

SPRiNTUS

CLEAN. SAFE. SPRiNTUS.

**Vaccum cleaners for
construction and industry**



CraftiX- & CraftiX XC series, HYDROX series, ARTOS, WATERKING series,
KETOS series, Xconnect, Floory L XC, ERA iGO ZERO



CRAFTIX & CRAFTIX XC series

Maximum health protection in the case of hazardous dusts.

Certified safety vacuum cleaners by SPRINTUS for dust classes L, M and H as well as asbestos extract dust where health-hazardous particles are generated. Directly at the power tool. And all this with automatic filter cleaning at a consistently high level of suction power.




Innovative safety vacuum cleaner with integrated radio-controlled socket

The innovative CraftiX range from SPRINTUS has been extended with the CraftiX XC model variant. The wireless module integrated in the safety vacuum cleaner ensures automatic start/stop when working with cordless tools and provides maximum health protection.

How CraftiX XC works

Once the transmitter has been attached to the power tool and paired with CraftiX XC, the transmitter communicates wirelessly with the integrated radio module. As soon as the power tool is switched on or off, the vacuum cleaner's automatic start/stop function is activated. This ensures easy and convenient dust control – when working with both corded and cordless tools.

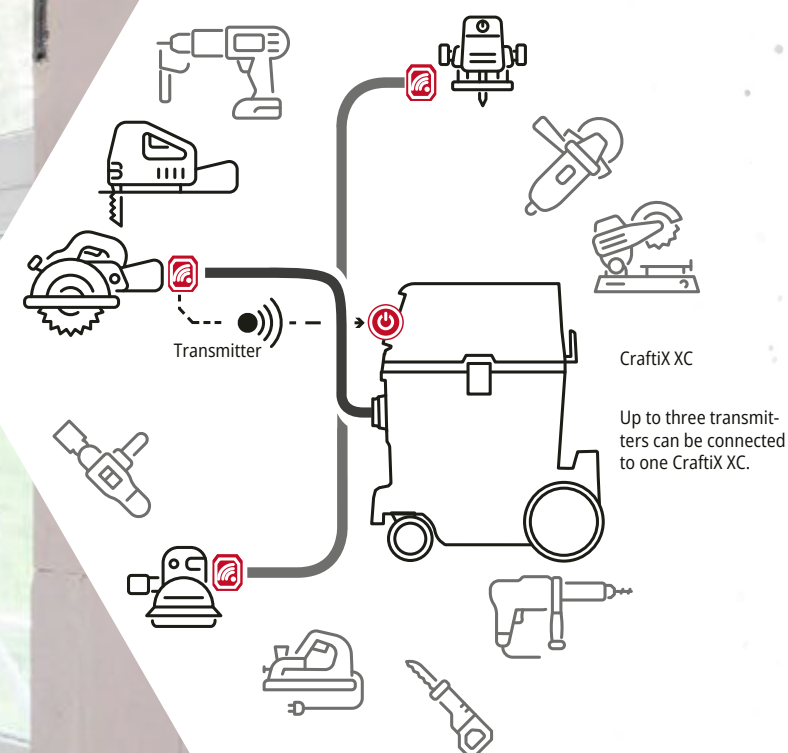

Highlights

- **Safety vacuum cleaner with integrated radio module**
Provides automatic start/stop when working with cordless and corded tools
- **Reliable connection with up to 3 transmitters**
Stable radio control – up to 30 m – without Wi-Fi, without cloud

The SPRiNTUS safety vacuum cleaners at a glance

For efficient control of dusts in dust classes L, M and H including asbestos, we offer you the CraftiX (XC) model series with a total of six safety vacuum cleaners – each available with or without an integrated wireless module. In all dust classes, you can choose between a model with a container volume of 35 or 50 litres.

Dust class L



- For dusts of dust class L
- Antistatic preparation for connecting an optional antistatic hose (Item-no. 118143) to prevent electrostatic charges
- Patented HEPA 13 cartridge filter

Dust class M



- For dusts of dust class L and M
- Standard anti-static equipment for extracting large amounts of fine dust
- Patented HEPA 13 cartridge filter
- The suction power is monitored by a warning device with a acoustic and visual signal

With the CraftiX (XC) models, you ensure maximum health protection for the user. The efficient filter cleaning keeps the filter permanently clear while maintaining consistently high suction power. This saves time and costs, as the filter cleaning takes place automatically without any interruption of suction or performance – even with extreme amounts of fine dust.

Dust class H



- For dusts of dust class L, M and H as well as asbestos dusts
- Standard anti-static equipment for extracting large amounts of fine dust
- Patented HEPA 14 cartridge filter
- The suction power is monitored by a warning device with a acoustic and visual signal



Good reasons for efficient dust control

Where power tools are used, dust is often produced – not just any dust, but hazardous fine dust that poses serious health risks. This type of dust should be extracted directly at the source: right at the power tool.

That’s exactly what the robust SPRINTUS CraftiX (XC) safety vacuum cleaners are designed for. Whether on construction sites or in workshops, they reliably extract harmful dusts with consistently high suction power before they can contaminate the breathable air. Fine dust particles, in particular, remain suspended in the air for extended periods and can penetrate deep into lung tissue. This can lead to asthma and other chronic respiratory diseases. For this reason, the use of certified safety vacuum cleaners is legally required on construction sites. With the SPRINTUS (CraftiX XC) safety vacuum cleaners, you protect users from these risks. Sawing, drilling, cutting, milling, and grinding tasks can be carried out efficiently and safely – without compromising health.



Guided by dust class – your application matters

What kind of safety vacuum cleaner is suitable for your application? The dust classes provide the answer to this question. Materials and their dusts are classified according to them and machines are certified, because the vacuum cleaners meet the corresponding requirements for dust control.

Dust class*	Maximum transmittance	Suitable for	Disposal
L 	≤ 1,0%	Dusts with OEL** values > 1mg/m3 Domestic dust, soil, lime	—
M 	< 0,1%	Dusts with OEL** values ≥ 0,1mg/m³ Wood, screed, primer coat and paint, plaster, cement, concrete, tile adhesive, paints such as latex and oil paints, quartz containing materials such as sand and pebbles	Low dust
H 	< 0,005%	Dusts with OEL** values < 0,1mg/m³ Carcinogenic dust, dust with pathogens, dust with bacteria	Dust free
 Asbestos requirement	< 0,005%	Dusts with OEL** values < 0,1mg/m³ Asbestos dust	Dust free


*according to the standard: IEC / EN 60335-2-69

**occupational exposure limit value


The table provides information about the maximum transmittance of a certified vacuum cleaner as well as the legal occupational exposure limit value of the dusts. Class-L dusts are classified as only slightly hazardous, those belonging to Class M are deemed hazardous and those belonging to Class H are regarded as extremely hazardous. No special regulations must be observed

when disposing L-dusts. M-dusts, on the other hand, must be disposed of in a low dust manner and H-dusts as well as asbestos dusts must be disposed of in a dust free manner. Depending on the dust class, the use of fleece filter bags (Item-no. 102031) or special PE disposal bags (Item-no. 118138) and PE disposal bags asbestos (Item-no. 118169) for dust free disposal is recommended.

Patented filter cleaning

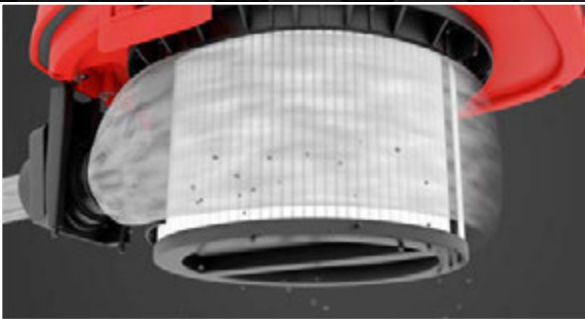

Dealing with hazardous dusts requires innovative product developments. The heart of the CraftiX is the patented HEPA 13 (dust class L, M) or HEPA 14 (dust class H) cartridge filter.

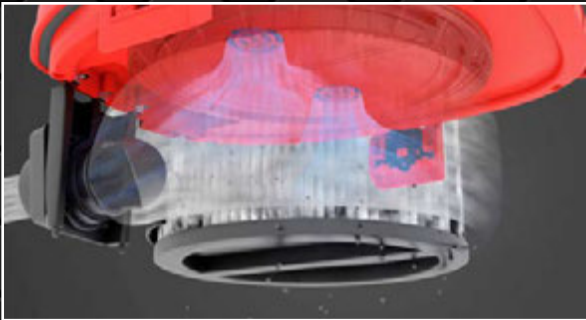


It consists of two independent filter chambers, which are cleaned one after the other. Suction current and suction power thus remain at a consistently high level even during cleaning, which guarantees permanent suction.



Filter cleaning is carried out by air backwashing and, thanks to the patented cartridge filter, ensures that the fine pores of the filter are freed from dust without leaving any residue. The maintenance and cleaning of the filter is no longer necessary and you save time and money.



Filter cleaning takes place automatically every 45 seconds. It is quieter than average and is therefore particularly user-friendly.

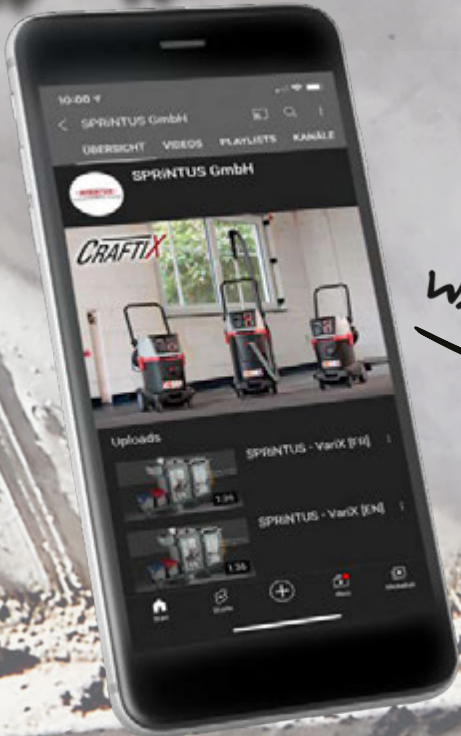

WATCH OUR FILM!

Discover our professional product video on



CraftiX (XC) advantages at a glance

Whether you choose an SPRiNTUS safety vacuum cleaner in dust class L, M or H, with or without an integrated radio module, all models have these innovative feature.

Practical cable hooks for convenient transport.

Flat surface on the motor head with retractable carrying handle for mounting the optional adapter plate for tool cases. Item-no. 118150

only CraftiX XC: Integrated radio module for activating the automatic start/stop function.

Easy-to-clean blow-out filter.

Adjustable, foldable push bar for easy transport.

Integrated tool key for filter change. Item-no. 118124

Patented filter cartridge. HEPA 13 (dust class L, M). Item-no. 118100
HEPA 14 (dust class H including asbestos). Item-no. 118166

Parking position for extra wide floor nozzle. Item-no. 102125

450 mm

All-round elastic buffer edges.

Locking brakes prevent the vacuum cleaner from rolling away.

Maxi chassis with extra-large construction-site-compatible wheels, Ø 180 mm, and swivel castors, Ø 100 mm.

Dust-tight lockable connection nozzle for dust-free transport.

Power tool adapter for connecting power tools with suction devices of different diameters.

Ø 21 / 25 / 32 mm Item-No. 118122
Ø 35 mm Item-No. 118139

Handle for ergonomic carrying.

63,5 cm (35 Liter)
77,0 cm (50 Liter)

54 cm 39 cm

Limitless customisation

With your personal logo sign, your brand is visible everywhere. Not only do you increase your brand awareness, but you can also label devices with inventory numbers or assign them to individual users.

YOUR LOGO

powered by **CRAFTIX**

BRIG
ELECTRICIANS

RY

powered by **CRAFTIX**

powered by **CRAFTIX**

Adapter plate for tool cases

With only a single adapter plate from SPRiNTUS you can attach tool cases of all common manufacturers to the CraftiX (Systainer, metaBOX, Tstak Box, L-Boxx, MAKPAC). The optional adapter plate can be mounted and locked on the motor head without tools and ensures safe transport of the tool boxes. Despite the mounted tool case, all operating elements and accessory slots can be used without restriction.

Optional Adapter plate. Item-no. 118150

Systainer*

Tstak Box*

L-Boxx*

metaBOX*

MAKPAC*

*Boxes not included

CraftiX controls

The suction power of CraftiX (XC) models of dust classes M and H, including asbestos, is monitored by a warning device. After setting the smallest diameter used in the suction harness, the user is alerted by both an acoustic and visual signal if the required airflow falls below the permissible level. This prevents increased dust exposure in the breathable air.



CraftiX (XC) 35 M/H, 50 M/H

- 1 Switch for hose diameter selection
- 2 High safety due to warning LED and acoustic warning signal.

CraftiX (XC) 35 L/M/H, 50 L/M/H

- 3 On/off button automatic filter cleaning.
- 4 Standard operation with infinitely adjustable power regulation.
- 5 Automatic operation with connected power tool and infinitely variable power regulation
- 6 Socket for power tools up to a maximum of 2.200 watts.
- 7 Customisation through logo cards.



Your advantages at a glance

- Consistently high suction power even during automatic filter cleaning
- Maximum health protection thanks to automatic start/stop when working with cordless and corded tools
- Patented cartridge filter with two independent filter chambers
- Very quiet automatic cleaning of both filter chambers every 45 seconds
- Large range of accessories and accessory storage directly on the device
- Just a single adapter plate for attaching all common tool cases to the CraftiX
- Unlimited customization with your personal logo sign



Technical Data:	35 L	35 L XC	35 M	35 M XC	35 H	35 H XC	50 L	50 L XC	50 M	50 M XC	50 H	50 H XC
Voltage	220-240 V / 50-60 Hz											
Max. Power	1200 W											
Sound pressure level	71 dB(A)											
Max. negative pressure	250 hPa / mbar* *Measured at the nozzle											
Volume flow	74 Litres / sec.											
Container material	plastic											
Container volume	35 Litres (gross)						50 Litres (gross)					
Weight	16 kg						19,5 kg					
Dimensions (L x W x H)	54 x 39 x 63,5 cm						54 x 39 x 77 cm					
Equipment												
Selector switch hose Ø			■		■				■		■	
Acoustic warning signal			■		■				■		■	
Warning LED			■		■				■		■	
Bluetooth integration	only XC		only XC		only XC		only XC		only XC		only XC	
	35 L	35 L XC	35 M	35 M XC	35 H	35 H XC	50 L	50 L XC	50 M	50 M XC	50 H	50 H XC
Item-No. EU	118001	118701	118030	118730	118060	118760	118015	118715	118045	118745	118075	118775
Item-No. UK	118003	118703	118032	118732	118062	118762	118017	118717	118048	118747	118077	118777

Standard accessories:							
Suction tube 0,5 m, stainless steel	102018	2 pcs	2 pcs	2 pcs	2 pcs	2 pcs	2 pcs
Suction hose 5 m, antistatic and oil resistant, Ø 35 mm	118143	□	■	■	□	■	■
Suction hose 5 m, Ø 35 mm		■			■		
Suction hose 2,5 m, antistatic and oil resistant, Ø 38 mm	118193	□	■	■	□	■	■
Dry floor nozzle 450 mm	102125	■	■	■	■	■	■
Crevice nozzle	102016	■	■	■	■	■	■
Round nozzle	102017	■	■	■	■	■	■
HEPA 13 cartridge filter	118100	■	■		■	■	
HEPA 14 cartridge filter	118166	□	□	■	□	□	■
Power cord: H07RNF, 10 m	118110	■	■	■	■	■	■
Power cord: H07RNF, 10 m, UK	118152	■	■	■	■	■	■
Tool key for filter change	118124	■	■	■	■	■	■
Power tool adapter Ø 21 / 25 / 32 mm	118122	■	■	■	■	■	■
Power tool adapter Ø 35 mm	118139	■	■	■	■	■	■
Vliesfiltertüten & Entsorgungsbeutel:							
Fleece filter bags 35 Liter (5 pieces)	102031	1 pcs	1 pcs	1 pcs			
Fleece filter bags 50 Liter (5 pieces)	102072				1 pcs	1 pcs	1 pcs
Disposal bags (5 pieces)	118138	□	1 pcs	□	□	1 pcs	□
Disposal bags asbestos (5 pieces)	118169	□	□	1 pcs	□	□	1 pcs
Optional accessories:							
Power tool adapter Ø 38 mm	118141	□	□	□	□	□	□
Adapter plate for tool cases	118150	□	□	□	□	□	□
Wet floor nozzle 450 mm	102124	□	□	□	□	□	□
Squeegees Set 450mm	102126	□	□	□	□	□	□
Handle, antistatic	118115	□	□	□	□	□	□
Set of brush strips 450mm for 10212	102127	□	□	□	□	□	□

■ standard accessories □ Optional accessories

HYDROX series

The new pump vacuums.
Compact. Powerful. Reliable.

**MADE IN
GERMANY**



HydroX Works

Powerful for
industry and general repairs

HydroX Fire

Professional equipment for fire
brigades and emergency services

The **HydroX** series redefines performance in the field of pump vacuums and is ideal for removing large volumes of water in the event of flooding, water damage or fire damage. Whether **HydroX Works** for industrial use or **HydroX Fire** for emergency services – both models combine maximum suction power with a powerful pump and compact design. The HydroX series with a 40-litre tank capacity is manufactured in Germany, ensuring the highest quality and reliability. Both vacuum cleaners offer an optimally balanced ratio of suction and pumping power, ensuring efficient and continuous operation. The dry-running pump features a quick-change system and can be easily removed, cleaned or replaced.

The new, large collection basket and the proven cyclone system ensure effective separation of coarse particles and foam. A 10 m dirty water hose with a diameter of 38 mm and the universal C-pipe connection for fire brigade and technical relief services hoses optimally convert the high pump performance into actual delivery performance. A PRCD personal protection switch and safe sockets (IP54 for HydroX Works 113010 & IP68 for HydroX Fire 113050) provide enhanced safety. Robust locking brakes, practical cable hooks, a flexible push bar and convenient accessory storage also ensure maximum ease of use.

HYDROX WORKS	VS	HYDROX FIRE
▶ IP54 socket* ▶ plastic fittings ▶ Max. delivery head of 9 metres ▶ Max. flow rate (pump) of 17,000 L/H		▶ IP68 socket* ▶ Aluminium C-coupling ▶ Aluminium floor nozzle ▶ Stainless steel suction tubes ▶ Increased pump power of 750 W ▶ Max. delivery head of 10 m ▶ Max. flow rate (pump) of 19,000 L/H

* only 113010 or 113050

Advantages



Well balanced suction and pump performance:

The HydroX Works achieves a pump power of 550 W with a maximum pump flow rate of 17,000 l/h and a delivery head of up to 9 m. The HydroX Fire scores with 750 W, a pump delivery rate of up to 19,000 l/h and a maximum delivery head of 10 m. This ensures continuous and efficient operation, even under demanding conditions.



Efficiently-designed filter basket:

Featuring small perforations in the lower section and wide openings at the top, it allows continuous drainage while effectively separating sludge and large particles. Its large capacity enables extended operation, and the basket can be easily removed for emptying and stands securely on the floor.

Features



Efficient quick-change system: Pump can be easily and quickly removed, cleaned and replaced




Optional adapter plate: for tool-free attachment of tool cases from all common manufacturers




Practical carrying handle: retractable for mounting the optional adapter plate for tool cases



Flexible push bar: adjustable and foldable for easy transport

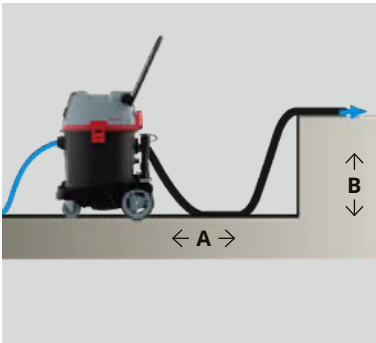

Maximum pumping distance:
HydroX Works: A 60 m, B 4 m
Hydrox Fire: A 60 m, B 5 m

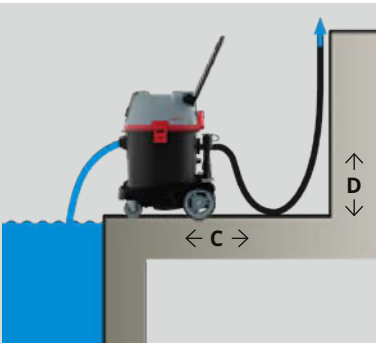

Maximum delivery head:
HydroX Works: C 10 m, D 9 m
Hydrox Fire: C 10 m, D 10 m



Easy-to-maintain exhaust air filter: simple to clean

Convenient cable hooks: for easy and secure transport

Universal C-coupling connection: for wastewater hose, compatible with fire brigade and technical relief services hoses (standard accessory 10 m)

Efficient drainage system: complete emptying of the container thanks to the bendable drainage hose

Sturdy locking brakes: prevent the vacuum cleaner from rolling away unintentionally

Robust on/off switch: rotary switch for reliable operation

Safe power supply: PRCD personal protection circuit breakers and safe sockets (IP54 or IP68) only 113010 or 113050



Customised logo sign: strengthens your brand and corporate image

Space for accessories: 3 slots and dovetail guide on the rear of the device

Operating principle



Fields of application



firefighting operations



flood operations



water damage



flat roof renovation

Technical Data:	HYDROX WORKS	HYDROX FIRE
Voltage	220V-240V / 50-60Hz	
Total power	1750 W	1950 W
Power consumption (device)	1200 W	
Power consumption (pump)	550W	750W
Sound pressure level	70 dB(A)	
Max. Suction	230 mbar*	
Volume flow rate	74 l/sec	
Max. flow rate (pump)	17.000 l/h	19.000 l/h
Max. suction height	2 m	
Max. delivery head (pump)	9 m	10 m
Container material	Plastic	
Container volume	40 Litres	
Wastewater connection	C-coupling	
Length of suction hose	7 m	
Length of discharge hose	10 m	
Diameter of hose	38 mm	
Diameter of tubes	38 mm	
Length of power cord	10 m	
Weight	22 kg	23 kg
Dimensions (L x B x H)	718 x 539 x 388 mm	

*Measured at the nozzle

		HYDROX WORKS	HYDROX FIRE
	Item-No. EU Item-No. UK	113010 113012	113050 113052
Standard accessories:			
C-hose pump side 10 m	113258	■	■
Suction hose 7 m	113257	■	■
Cyclone insert	113222	■	■
Suction tube plastic	113245	4 pcs	□
Suction tube 0,5 m, stainless steel	102018	□	2 pcs
Removable filter basket	113215	■	■
Crevice nozzle 240 mm	102016	■	■
Wet floor nozzle 360 mm	109114	■	□
Wet floor nozzle Metal 450 mm	113250	□	■
Pump 550 W	113235	■	□
Pump 750 W	113234	□	■

■ standard accessories

□ Optional accessories



ARTOS

High-quality, powerful wet / dry vacuum cleaner at a fair price.



Suggested Use

The vacuum cleaner is perfect for cleaning buildings, industrial facilities and workshops due to its power, compact size and robust design.

The wet / dry vacuum cleaner Artos in the 30-litre class impresses thanks to its high quality and sensational value for money. Innovative features, such as the cyclone water separation system with a reliable floater system, sets the Artos clearly apart from the other wet / dry vacuum cleaner models in the entry-level class. The wide chassis and

long wheelbase make the Artos a particularly agile machine, which can be manoeuvred easily over the surface to be cleaned. The 360 mm wide floor nozzle included in the basic configuration is extremely user-friendly and can be converted from a wet floor nozzle to a dry floor nozzle by simply exchanging the rubber strips for brush strips without the use of tools. High-quality components, such as the strong stainless-steel container and the 1200 Watt motor, make the Artos a robust and reliable partner in professional cleaning.

Technical Data:	
Voltage	220-240 V / 50 Hz
Max. Power	1200 W
Sound pressure level	72 dB(A)
Volume flow	48 Litres / sec.
Max. negative pressure	230 mbar*
Container material	Stainless steel
Container volume	30 Litres (gross)
Length of power cord	7,5 m
Length of suction hose	2,5 m
Diameter of suction hose	32 mm
Diameter of suction tube	32 mm
Weight	8,9 kg
Dimensions (L x W x H)	42 x 38 x 63 cm

*Measured at the nozzle





Four accessories slots and a park position for attachments on the back.

The illustration shows the patented water separation system with cyclone unit. Item-No. 116105

Due to the twist of the intake nozzle, the spray-fog is consequently diverted along the inner container wall.

Additional filters are no longer necessary. The reliable floater system even reacts during heavy foaming. Cooling air slots located on the side ensure the consistent separation of cooling and processed air.

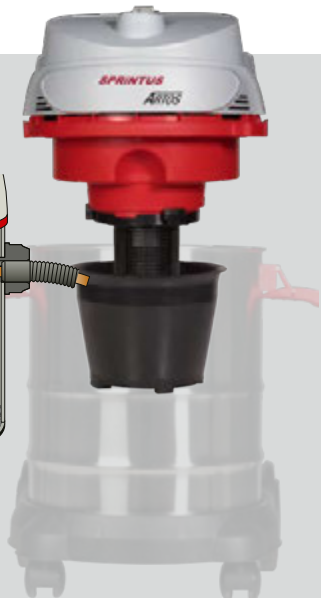

Cyclone unit.
Item-No. 116105




HEPA 13 fine dust filter
cartridge.
Item-No. 116106



Easy hose click system.



Easy to exchange
rubber strips, no
tools required.
Item-no. 101101

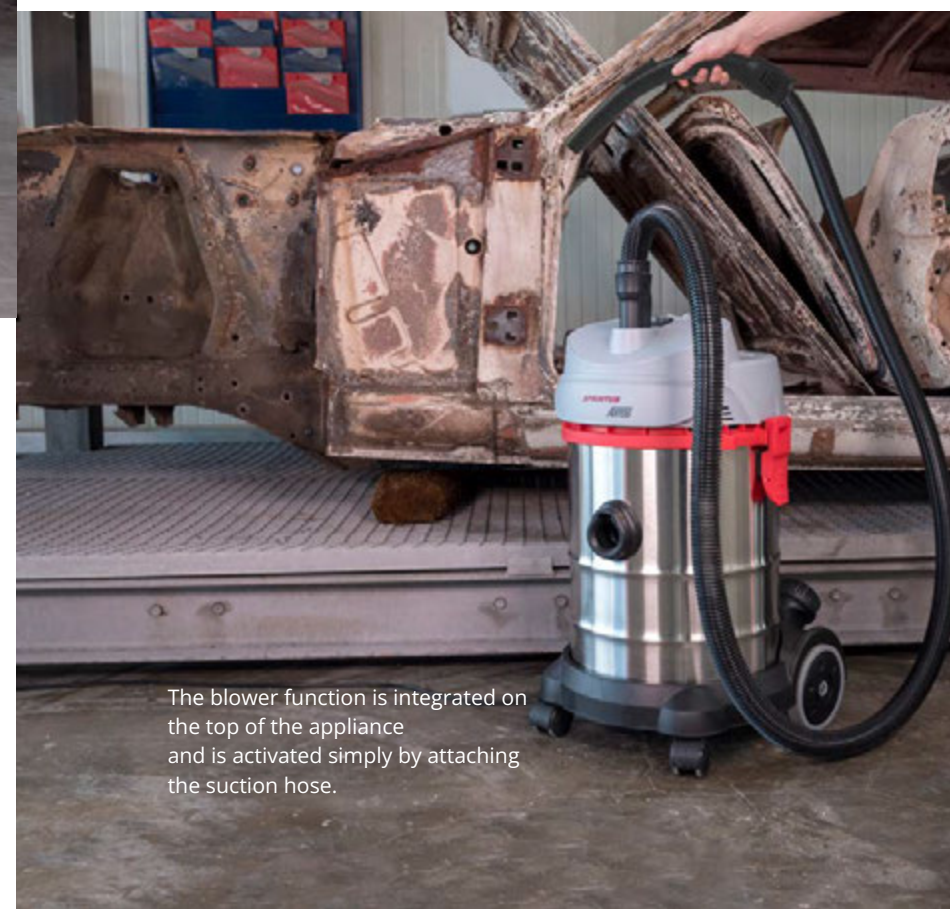

The blower function is integrated on the top of the appliance and is activated simply by attaching the suction hose.

	Item-No.	UK	EU
ARTOS	116006		116001
Standard accessories:			
2x Suction tube 0,5 m, aluminum			106026
Suction hose complete, 2,5 m			114113
Wet floor nozzle 360 mm			101106
Brush strip set 360 mm			101100
Crevise nozzle 220 mm			101023
Round nozzle Ø 75 mm			101024
Cyclone unit			116105
Fleece filter bag (1 pcs)			
HEPA 13 Fine dust filter cartridge			116106
Power cord, 7,5 m , black		101107	101074
Optional accessories:			
Fleece filter bag (5 pcs)			101020
Telescopic suction tube 0,6 - 1,0 m, stainless steel			117228
Spare lip for 101106			101101
Suction hose, 2 m, antistatic			120124



WATERKING series

With 260 mbar suction power at 70 L/Sec, the two models **Waterking** and **Waterking XL** are extremely powerful and enable excellent area performance. Thanks to the mechanical output regulator, suction power can be adapted to any kind of flooring. With the integrated blower function, filters and work benches can be blown clean, or wet surfaces can be blown dry. On-device storage for the hose, power

cord and accessories, as well as a parking position for the tube and an ergonomic handle, ensure optimal handling and make the two devices fit for professional use. A high-performance power socket located on the head allows for the use of further cleaning machines directly through the vacuum.

Highlights

- ▶ Outstanding water/dirt intake
- ▶ Consistent separation of intake air and processed air
- ▶ Reliable floating gauge even reacts during heavy foam growth
- ▶ Cyclone water separation system
- ▶ Rotary joint on the suction hose for hindrance-free maneuvering
- ▶ Ideally suited for dry vacuuming in combination with the fine dust filter cartridge and the fleece filter bag
- ▶ Mess-free waste disposal thanks to the closeable fleece filter bag
- ▶ Robust chassis with large swivel casters and wheels


Features



The blower function is integrated into the back side of the device and is activated by simply inserting the suction hose.




A powerful electrical outlet enables the use of additional cleaning tools directly through the vacuum cleaner.

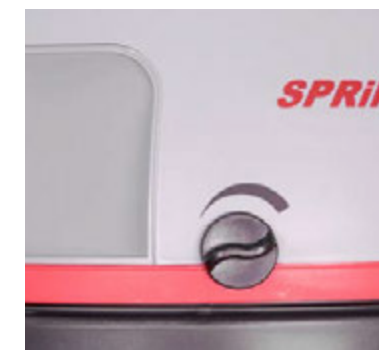

Thanks to the mechanical output regulator, suction power can be adapted to any kind of flooring.




Always close to the action: Four accessory slots and a park position for attachments on the back of the vacuum

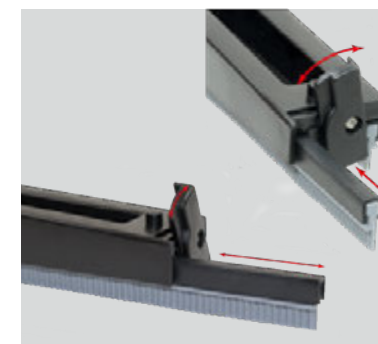

Easy, tool-free change of rubber lips.

Patented water separation system

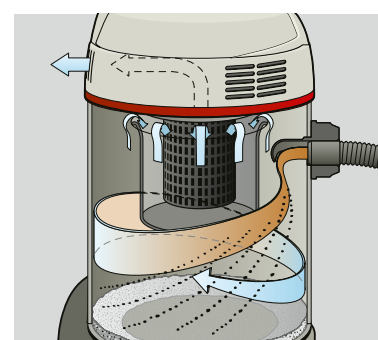

Due to the twist of the intake nozzle, the spray-fog is consequently diverted along the inner container wall. Additional filters are no longer necessary. The reliable floater system even reacts during heavy foaming. Cooling air slots located on the side ensure the consistent separation of cooling and processed air.



Cyclone insert for wet vacuuming.



HEPA 13 fine dust Filter cartridge for dry vacuuming.

WATERKING

- ▶ 30 litres container volume
- ▶ 360 mm wide floor nozzles

WATERKING XL

- ▶ 45 litres container volume
- ▶ 450 mm wide floor nozzles
- ▶ Innovative locking brake on the sturdy chassis
- ▶ Large, easy-to-remove push bar
- ▶ Drain hose for comfortably emptying the container
- ▶ Rubber-coated swivel casters and back wheels
- ▶ High volume flow rate thanks to 38 mm hose and tube diameter



Waterking

Waterking XL

Additional equipment for Waterking XL



Wastewater drain hose for easy emptying of the container.



The locking brake can be operated from either side and prevents the vacuum cleaner from rolling away.



Sturdy chassis of impact-resistant plastic.

Large rubber-coated swivel casters Ø 100 mm and back wheels Ø 180 mm.

Tool free removable push bar.



Accessories



Professional metal floor nozzle 450 mm for the toughest jobs.
Item-No. 113250



Antistatic suction hose, 3 m.
Waterking Item-no. 109112
Waterking XL Item-no. 118193

Technical Data:	Waterking	Waterking XL
Voltage	220-240 V / 50 Hz	
Max. Power	1300 W	
Number of turbines	max. 1500 W	
Sound pressure level	68 dB(A)	70 dB(A)
Volume flow	70 Litres / sec.	
Max. negative pressure	230 mbar*	
Container material	Plastic	
Container volume	30 Litres (gross)	45 Litres (gross)
Length of power cord	7,5 m	10 m
Length of suction hose	2,5 m	3,0 m
Diameter of suction hose	32 mm	38 mm
Diameter of suction tube	38 mm	
Weight	7,8 kg	13,5 kg
Dimensions (L x W x H)	46 x 38 x 59 cm	49 x 44 x 77 cm

*Measured at the nozzle

		Waterking	Waterking XL
	Item-No. EU Item-No. UK	109001 109500	109900 109902
Standard accessories:			
Suction tube 0,5 m, stainless steel	102018	2 pcs	2 pcs
Suction hose, 2,5 m	109069	■	□
Suction hose, 3,0 m	102013	□	■
Wet floor nozzle 360 mm	109114	■	□
Wet floor nozzle 450 mm	102124	□	■
Dry floor nozzle 360 mm	109071	■	□
Dry floor nozzle 450 mm	102125	□	■
Crevice nozzle	102016	■	■
Round nozzle	102017	■	■
HEPA 13 Fine dust filter cartridge	109058	■	■
Fleece filter bags (5 pieces)	101020	1 pcs	
Fleece filter bags (5 pieces)	102031		1 pcs
Cyclone unit	109057	■	■
Power cord, 7,5 m , black	109023	■	□
Power cord, 10 m , black	109910	□	■
Power cord, 10 m , black (UK)	109919	■	■
Accessories			
Floor nozzle, metal, 450 mm	113250	□	□
Suction hose, 2,5 m, antistatic	109112	□	
Suction hose, 2,5 m, antistatic	118193		□
Spare lip 360mm	101101	□	
Squeegees 450 mm	102126		□

■ standard accessories □ Optional accessories



KETOS series

Comes with 2-power settings:
Economy and Turbo.

The two KETOS models are bursting with strength. These are extremely powerful, modern and commercial professional vacuum cleaners of top class and thus are made for heavy daily use of contractors, industry, maintenance service and food service. The KETOS series connected high performance motors attain a suction power of 300 mbar at a volume flow of 70 litres/sec. per motor. They create a kind of turbo charging effect, which triggers the machine's intense power spectrum at a sound pressure level of only 69 dB(A) while operating at full capacity.

With the **KETOS 56/2 E** and **KETOS 81/2 K**, you work sustainably and efficiently at the cutting-edge of technology and can choose between the Economy

and Turbo settings according to the demand. The reliable, patented cyclone water separation system assures optimal water intake. Furthermore, the KETOS models are equipped with a blower function on the back side of the machine, which is activated simply by inserting the suction hose, with a robust undercarriage, metal swivel casters and rubber-coated wheels, a large lockable cable hook and an additional blower hose. The filter cartridge is easily removable. Thus, the machine's fine dust collection class can be upgraded to EPA12.

Features



The two devices are equipped with an easily removable filter cartridge on the exhaust side, upgradable to EPA12.



Clever solution:
Large, lockable cable hook, thanks to its swivel joint.



Switch on the face of the machine lets you choose between Economy and Turbo settings. Thanks to the mechanical output regulator, suction power can be adapted to any kind of flooring.

Highlights


- ▶ Extremely high-performance with 300 mbar suction power
- ▶ Economy and Turbo power settings
- ▶ Mechanical power regulation
- ▶ Low noise generation, only 69 dB(A)
- ▶ Robust chassis, stable metal swivel casters, rubber-coated wheels
- ▶ Systematically separated cool and processed air
- ▶ All accessories stored at the backside of device
- ▶ Push bar and vacuum tube made of stainless steel
- ▶ Cyclone water separation system
- ▶ Unique, lockable cable hook
- ▶ Blower function



KETOS 56 / 2 E

KETOS 81 / 2 K

Patented water separation system

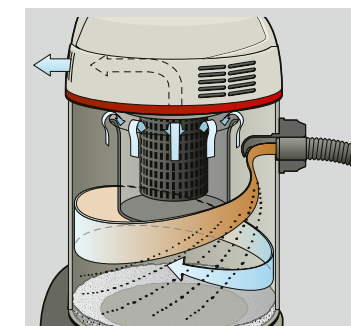

Due to the twist of the intake nozzle, the spray-fog is consequently diverted along the inner container wall. Additional filters are no longer necessary. The reliable floater system even reacts during heavy foaming. Cooling air slots located on the side ensure the consistent separation of cooling and processed air.



Cyclone insert for wet vacuuming.



HEPA 13 filter cartridge for dry vacuuming.

KETOS 56 / 2 E

- ▶ 55 litres container volume
- ▶ Solid stainless steel container
- ▶ Emptying by tipping the body or via the wastewater drain hose



KETOS 81 / 2 K

- ▶ 80 litres container volume
- ▶ Wear-resistant plastic container
- ▶ Emptying via the wastewater drain hose
- ▶ Complete drainage of wastewater

Additional equipment
for KETOS 56 / 2 E



The KETOS can either be tilted or conveniently emptied via the waste-water drain hose.



Optional for the KETOS 56/2 E
The 650 mm gangway nozzle can be conveniently operated by foot pedal from the rear of the vacuum cleaner.
Item no. 102010



Additional equipment
for Ketos 81/2 K

Wastewater drain hose for a convenient and complete emptying of the container



Accessories



Professional metal floor nozzle 450 mm for the toughest jobs.
Item-No. 113250



Antistatic suction hose, 2,5 m.
Item-No. 118193

Technical Data:	Ketos 56/2 E	Ketos 81/2 K
Voltage	220-240 V / 50 Hz	
Max. Power	2600 W	
Number of turbines	2	
Sound pressure level	74 dB(A)	
Volume flow	2 x 70 Litres / sec.	
Max. negative pressure	300 mbar*	
Container material	Stainless steel	Plastic
Container volume	55 Litres (gross)	80 Litres (gross)
Length of power cord	10 m	
Length of suction hose	3 m	
Diameter of suction hose	38 mm	
Diameter of suction tube	38 mm	
Weight	21 kg	20,6 kg
Dimensions (L x W x H)	47 x 54 x 90 cm	62 x 45 x 98 cm

		Ketos 56 / 2 E	Ketos 81 / 2 K
	Item-No. EU Item-No. UK	112001 112008	112002 112009
Standard accessories:			
Suction tube 0,5 m, stainless steel	102018	2 pcs	2 pcs
Suction hose, 3,0 m	102013	■	■
Wet floor nozzle 450 mm	102124	■	■
Dry floor nozzle 450 mm	102125	■	■
Crevice nozzle	102016	■	■
Round nozzle	102017	■	■
HEPA 13 Fine dust filter cartridge	109058	■	■
Fleece filter bag 35 L (5 pieces)	102031	1 pcs	
Fleece filter bag 50 L (5 pieces)	102072		1 pcs
Cyclone unit	109057	■	■
Power cord, 10 m , black	112135	■	■
Power cord, 10 m , black (UK)	112149		
Optional accessories:			
Floor nozzle, metal, 450 mm	113250	□	□
Suction hose, 2,5 m, antistatic	118193	□	□
Suction hose complete, 15 m	102032	□	□

XCONNECT

Intelligent automatic start/stop
Simple. Clean. Safe.



The innovative Xconnect appliance control system enables automatic start/stop operation, even when using cordless tools! It saves a considerable amount of time, as the extraction of fine dust from the power tool starts automatically as soon as the cordless tool starts working. This means that extraction can be carried out automatically not only on corded tools but also on cordless tools from any manufacturer.

The intelligent transmitter is attached to the power tool and detects whether it is switched on or off. The transmitter transmits the signal wirelessly to the radio-controlled socket. This activates the vacuum cleaner – for a dust-free working environment and maximum health protection. The radio-controlled socket can be controlled by up to three different transmitters.


Technical Data:	
Operating range	max. 30 m
Frequency band	2.400-2.483 MHz
Ambient temperature	0°C to +35°C
Storage temperature	-30°C bis +70°C
Protection class	IP44
Radio-controlled socket outlet	
Power supply	230 V~
Switching cable max	3600 W
Transmitter	
Power supply	1x CR2032 battery



Activation via transmitter on the tool



Intelligent control via the receiver module

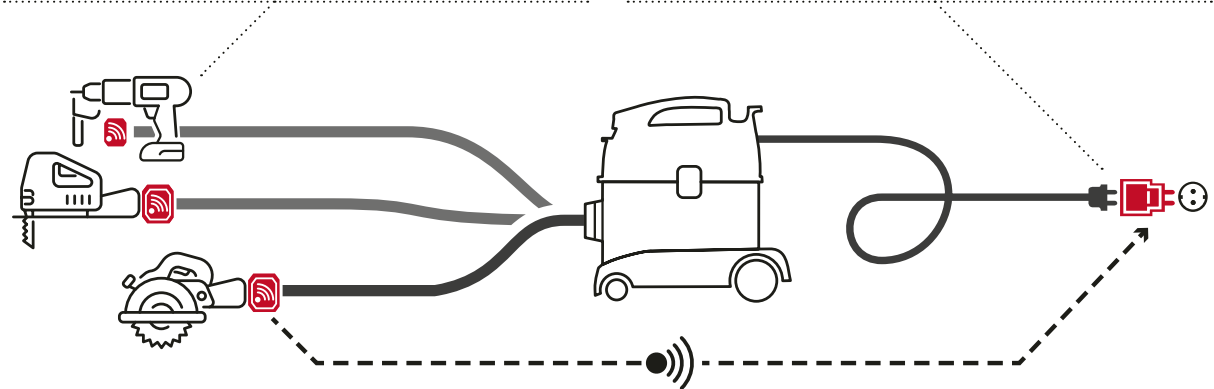

Up to three transmitters can be connected to one receiver.

Highlights

- ▶ **Universal application**
For cordless and corded tools, compatible with all manufacturers
- ▶ **Reliable connection**
Stable radio control – up to 30 m – without Wi-Fi, without cloud
- ▶ **Automatic vacuum cleaner activation and deactivation**
Starts/stops the vacuum cleaner when the tool is switched on/off
- ▶ **Quick retrofitting**
Plug-and-play: no conversion, ready for use in a few minutes
- ▶ **High flexibility**
One reciever can be controlled with up to 3 transmitters
- ▶ **Protects health**
Efficient dust minimisation throughout the entire work process
- ▶ **Sustainable & cost-efficient**
No need to purchase a new vacuum cleaner or tool
- ▶ **Ready for immediate use**
No need to activate the transmitter after a long break
- ▶ **Reliable sensor technology**
Sensitive sensor technology for very weak vibrations & special sensor technology for reliable switching even with large machines with strong vibrations



Xconnect Set: Transmitter, Replacement strap & Reciever EU

	Item-No.	EU
Xconnect Set		118342
Standard accessories:		
Xconnect Receiver		118340
Xconnect Transmitter (incl. replacement strap)		118341
Xconnect Replacement strap		118343

*on request

FLOORY L XC

Clean work,
smart vacuuming

MADE IN
GERMANY



Xconnect Set:
Transmitter & Receiver EU
Item-No. 118342



Power tool adapter
Item-No.101025



2x Suction tube 0,5 m,
aluminum
Item-No. 106026



Crevice nozzle 220 mm
Item-No. 101023



Round nozzle
Item-No. 101024



Hard floor nozzle 360 mm
Item-No. 111202



The **Floory L Xc** expands SPriNTUS's proven dry vacuum cleaner family with modern Xconnect technology and features that have been consistently developed to meet the requirements of professional craftsmanship. As a dry vacuum cleaner in **dust class L**, it impresses with its high suction power, quiet operation and robust, compact design – ideal for users in crafts such as electrical installation, carpentry, drywall construction and exhibition stand construction.

Thanks to the intelligent Xconnect automatic start/stop function, the vacuum cleaner can be combined with cordless and corded tools from any manufacturer. The innovative device control ensures that the vacuum cleaner switches on and off automatically when cordless or cabled tools are in use. This results in a particularly convenient, efficient and low-dust working method – without the need for manual switching on and off.

The included, multi-tiered power tool adapter can be precisely adjusted to different tool diameters and ensures a secure, reliable seal. This keeps the working environment constantly clean – without any additional operating effort. Its lightweight, sturdy construction and practical handling make the Floory L Xc a reliable companion in everyday professional work.

Its high level of user comfort and ergonomically designed construction enable efficient working, even in confined spaces or during mobile use. The accessories supplied cover all typical cleaning and extraction tasks in a commercial environment:

Xconnect-System – enables comfortable, efficient and low-dust working thanks to intelligent automatic start/stop for cordless and electric tools.

Power tool adapter – for a secure, tight connection between the vacuum cleaner and the power tool for a consistently clean working environment.

Crevice nozzle – reaches delicate areas, corners and hard-to-reach places thoroughly and precisely.

Round brush – ideal for gently removing dust from sensitive surfaces, machine housings or workpieces.

Hard floor nozzle – suitable for reliable cleaning of workshop and construction site floors and for picking up loose particles and coarse dust.

The Floory L Xc combines powerful performance, mobility and features that are consistently tailored to the use in professional craftsmanship. This makes it the ideal choice for users who need a reliable, durable and efficient vacuum cleaner for daily use on construction sites and in workshops.

Technical Data:	
Voltage	220-240 V / 50 Hz
Max. Power	700 W
Max. negative pressure	210 mbar*
Volume flow	38 Litres / sec.
Sound pressure level	60 dB(A)
Container material	Plastic
Container volume	11 Litres (gross)
Filter bag volume	7 Litres
Length of power cord	10 m
Length of suction hose	3 m
Diameter of suction hose	32 mm
Diameter of suction tube	32 mm
Weight	4,2 kg
Dimensions (L x W x H)	35 x 29 x 38 cm

*Measured at the nozzle




Wireless automatic start/stop
via Xconnect.



Multi-tiered power tool adapter for
all common tool diameters.



Large foot switch for turning on
and off without bending down.

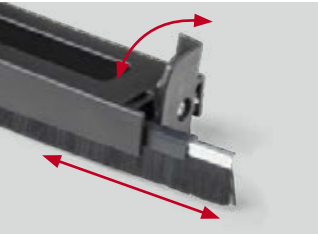

Easy, tool-free change of
hard floor brushes

	Item-No.	EU
FLOORY L XC		114077
Standard accessories:		
Xconnect Set		118342
Power tool adapter		101025
2x Suction tube 0,5 m, aluminum		106026
Suction hose, 3m, electrically conductive		120141
Hard floor nozzle 360 mm		111202
Crevice nozzle 220 mm		101023
Round nozzle		101024
HEPA 13 Fleece filter bag (1 pcs)		
HEPA 13 Fleece filter basket		114118
Power cord 10 m, pluggable, black		111128
Optional accessories:		
Fleece filter bag (10 pcs)		106013
Fleece filter bag (250 pcs)		106014
HEPA 13 Fleece filter bag (10 pcs)		106061
Suction hose complete, 2,5 m		114113
Telescopic suction tube 0,6 - 1,0 m, stainless steel		117228
Suction hose, 2,5 m, antistatic		109111



ERA iGO ZERO

Cordless, 58 [dB] silent dry vacuum cleaner as 36 V Li-Ion version



Technical Data:	ERA iGO ZERO
Voltage	36 V
Max. Power	300 - 150 W
Max. negative pressure	160 - 100 mbar*
Volume flow	33 Litres / sec.
Sound pressure level	58-62 dB(A)
Container material	Plastic
Container volume	13 Litres (gross)
Filter bag volume	9 Litres
Li-ion battery as standard	2 x 18 V, 5 Ah
Li-ion battery optional	2 x 18 V, 7,5 Ah
Length of suction hose	2 m
Diameter of suction hose	32 mm
Diameter of suction tube	32 mm
Weight	4,7 kg**
Dimensions (L x W x H)	38 x 28 x 43 cm

*Measured at the nozzle **without Li-ion battery



The **ERA iGO ZERO** cordless dry vacuum cleaner guarantees maximum flexibility and mobility. The powerful 36 V Li-Ion system combines autonomous, cable-free operation with the unique features of the ERA ZERO model series, setting new standards in professional cleaning. Equipped with two 18 V batteries and a 300 W EC motor, the ERA iGO ZERO delivers excellent cleaning performance. The 7.5 Ah batteries connected in series allow for up to 90 minutes of uninterrupted operation, making it ideal for extended cleaning tasks. The power output is continuously adjustable between 150 and 300 watts directly on the device, allowing the suction performance to be easily adapted to any type of flooring. A clear display on the motor head keeps you informed at all times about the current power level and battery status, ensuring optimal control during use. The ERA iGO ZERO also impresses with its extremely

low sound pressure level of just 62 dB, or 58 dB in ECO mode, making it perfectly suited for noise-sensitive and high-traffic environments such as hotels, offices, hospitals, and kindergartens. High-quality HEPA 13 filter media ensure clean exhaust air at all times, making the vacuum cleaner ideal for allergy sufferers and for use in sensitive areas. The extra-large, tear-resistant 9-litre fleece filter bag offers a high dirt absorption capacity and enables long working intervals without frequent and inconvenient bag changes. Additionally, the ERA iGO ZERO enhances your brand visibility and corporate image thanks to a customizable logo badge on the device. This premium vacuum cleaner is proudly MADE IN GERMANY, manufactured at the SPRiNTUS headquarters in southern Germany.



58-62 dB(A)



5,9 kg



up to 90 Min

Our goal: 'Zero emissions' – avoiding, reducing and completely offsetting CO₂ emissions.



Product with financial
climate contribution
ClimatePartner.com/17872-2309-1001



2 x 5 Ah battery for up to 60 minutes of runtime
2 x 7.5 Ah battery for up to 90 minutes of runtime.

Display: Indicating current power level and battery status

Customisation with your logo.

The two batteries installed on the motor head create a low center of gravity, which significantly reduces the vacuum cleaner's risk to tip over.

Handle including an extendable carrying strap.



System HEPA X3:

HEPA 13 filter cartridge:	Item-No. 111181
Optional: HEPA 14 filter cartridge:	Item-No. 111199
HEPA 13 fleece filter basket:	Item-No. 114118
HEPA 13 fleece filter bag:	Item-No. 106061

		ERA iGO ZERO	ERA iGO ZERO 5 Ah	ERA iGO ZERO 7,5 Ah
	Item-No. EU Item-No. UK	Z120001	Z120002 Z120004	Z120003 Z120005
Standard accessories:				
Telescopic suction tube 0,6 - 1,0 m, stainless steel	117228	■	■	■
Suction hose, 2 m, antistatic	120124	■	■	■
Combi nozzle 280 mm	114114	■	■	■
 Upholstery nozzle 130 mm	117294	■	■	■
Crevice nozzle 220 mm	101023	■	■	■
HEPA 13 Fleece filter bag		2 pcs	2 pcs	2 pcs
HEPA 13 Fleece filter basket	117101	■	■	■
HEPA 13 filter cartridge, black	111181	■	■	■
Double charger	122240	□	■	■
Double charger, UK	122251			
Li-ion battery pack 18V, 5 Ah	122238	□	2 pcs	□
Li-ion battery pack 18V, 7,5 Ah	122239	□	□	2 pcs
Fleece filter bags:				
Fleece filter bag (10 pcs)	106013	□	□	□
Fleece filter bag (250 pcs)	106014	□	□	□
HEPA 13 Fleece filter bag (10 pcs)	106061	□	□	□
Optional accessories:				
Li-ion battery pack 18V, 9 Ah	122276	□	□	□
Suction tube 0,5 m, aluminum	106026	□	□	□
Suction hose complete, 2,5 m	114113	□	□	□
HEPA 14 filter cartridge, black	111199	□	□	□

■ standard accessories

□ Optional accessories





4 262553 154784



You can find our complete range
and the current general catalogue
on our website at any time.



www.sprintus.eu

SPRINTUS GmbH | Reizenwiesen 1 | 73642 Welzheim / Germany