

# HYDROX series

**SPRINTUS**

MADE IN  
GERMANY

NEW FOR 2026



**HydroX Works**  
Powerful for  
industry and general repairs

**HydroX Fire**  
Professional equipment for fire  
brigades and technical relief services

The new pump vacuums. Compact. Powerful. Reliable.

The **HydroX** series redefines performance in the field of pump vacuums and is ideal for removing large volumes of water in the event of flooding, water damage or fire damage. Whether **HydroX Works** for industrial use or **HydroX Fire** for emergency services – both models combine maximum suction power with a powerful pump and compact design.

The HydroX series with a 40-litre tank capacity is manufactured in Germany, ensuring the highest quality and reliability. Both suction pumps offer an optimally balanced ratio of suction and pumping power, ensuring efficient and continuous operation. The dry-running pump features a quick-change system and can be easily removed, cleaned or replaced.

The new, large collection basket and the proven cyclone system ensure effective separation of coarse particles and foam. A 10 m dirty water hose with a diameter of 38 mm and the universal C-pipe connection for fire brigade and technical relief services hoses optimally convert the high pump performance into actual delivery performance.

A PRCD personal protection switch and safe sockets (IP54 for HydroX Works 113010 & IP68 for HydroX Fire 113050) provide enhanced safety. Robust locking brakes, practical cable hooks, a flexible push bar and convenient accessory storage also ensure maximum ease of use.

## HYDROX FIRE

- ▶ IP68 socket\*
- ▶ Aluminium C-coupling
- ▶ Aluminium floor nozzle
- ▶ Stainless steel suction tubes
- ▶ Increased pump power of 750 W
- ▶ Max. delivery head of 10 m
- ▶ Max. flow rate (pump) of 19,000 L/H



## HYDROX WORKS

- ▶ IP54 socket\*
- ▶ plastic fittings
- ▶ Max. delivery head of 9 metres
- ▶ Max. flow rate (pump) of 17,000 L/H

\* only 113010 or 113050

## Advantages:



**Well balanced suction and pump performance:** The HydroX Works achieves a pump power of 550 W with a maximum pump flow rate of 17,000 l/h and a delivery head of up to 9 m. The HydroX Fire scores with 750 W, a pump delivery rate of up to 19,000 l/h and a maximum delivery head of 10 m. This ensures continuous and efficient operation, even under demanding conditions.



**Efficiently-designed filter basket:** Featuring small perforations in the lower section and wide openings at the top, it allows continuous drainage while effectively separating sludge and large particles.

Its large capacity enables extended operation, and the basket can be easily removed for emptying and stands securely on the floor.

## Features:



**Efficient quick-change system:**  
Pump can be easily and quickly removed, cleaned and replaced




**Optional adapter plate:** for tool-free attachment of tool cases from all common manufacturers




**Practical carrying handle:** retractable for mounting the optional adapter plate for tool cases



**Flexible push bar:** adjustable and foldable for easy transport

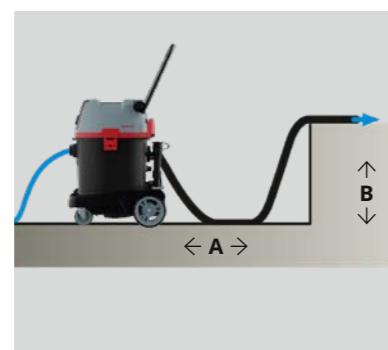

**Maximum pumping distance:**  
HydroX Works: A 60 m, B 4 m  
Hydrox Fire: A 60 m, B 5 m

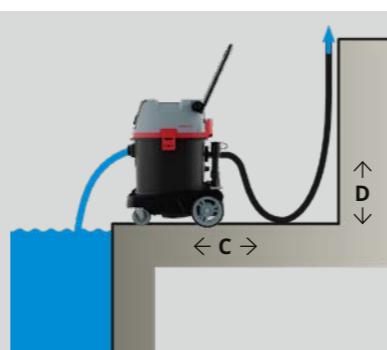

**Maximum delivery head:**  
HydroX Works: C 10 m, D 9 m  
Hydrox Fire: C 10 m, D 10 m



## Operating principle:

Water is sucked in through the suction hose. The integrated wastewater pump immediately pumps the collected water through the C-pipe connection at the rear of the device.



## Fields of application:



firefighting operations



flood operations



water damage



flat roof renovation

Technical Data:	HYDROX WORKS	HYDROX FIRE	HYDROX WORKS	HYDROX FIRE
Voltage	220V-240V / 50-60Hz			
Total power	1750 W	1950 W		
Power consumption (device)	1200 W			
Power consumption (pump)	550W	750W		
Sound pressure level	79 dB(A)			
Max. Suction	230 mbar*			
Volume flow rate	74 l/sec			
Max. flow rate (pump)	17.000 l/h	19.000 l/h		
Max. suction height	2 m			
Max. delivery head (pump)	9 m	10 m		
Container material	Plastic			
Container volume	40 Litres			
Wastewater connection	C-coupling			
Length of suction hose	7 m			
Length of discharge hose	10 m			
Diameter of hose	38 mm			
Diameter of tubes	38 mm			
Length of power cord	10 m			
Weight	22 kg	23 kg		
Dimensions (L x B x H)	718 x 539 x 388 mm			

\*Measured at the nozzle

	HYDROX WORKS	HYDROX FIRE
Item-No. EU	113010	113050
Item-No. UK	113012	113052
Standard accessories:		
C-hose pump side 10 m	113258	<input checked="" type="checkbox"/>
Suction hose 7 m	113257	<input checked="" type="checkbox"/>
Cyclone insert	113222	<input checked="" type="checkbox"/>
Suction tube plastic	113245	4 pcs <input type="checkbox"/>
Suction tube 0,5 m, stainless steel	102018	<input type="checkbox"/> 2 pcs
Removable filter basket	113215	<input checked="" type="checkbox"/>
Crevice nozzle 240 mm	102016	<input checked="" type="checkbox"/>
Wet floor nozzle 360 mm	109114	<input checked="" type="checkbox"/>
Wet floor nozzle Metal 450 mm	113250	<input type="checkbox"/> <input checked="" type="checkbox"/>
Pump 550 W	113235	<input checked="" type="checkbox"/>
Pump 750 W	113234	<input type="checkbox"/> <input checked="" type="checkbox"/>

standard accessories

Optional accessories